

2MP Super Starlight Mini IR Dome


ModelNo: N-2MP-IMD-IR15-S-2.8mm



Key Features

- H.265 Codec
- Ultra Low Light 0.002Lux
- Up to 1920x1080 High Resolution
- Smart IR, IR Range: 10m~15m
- NIR, WDR, 3D DNR, BLC,HLC, Dual-ICR, AWB, AGC, BLC
- Triple Streams
- Tripwire Detection
- Perimeter Detection
- Support Wifi
- Audio I/O 1/1, Alarm I/O 1/1, MicroSD Card Slot, Up to 128GB
- TVS 6000V, Lightning/Surge 2000V Protection, IK10
- CE, FCC

Dimensions

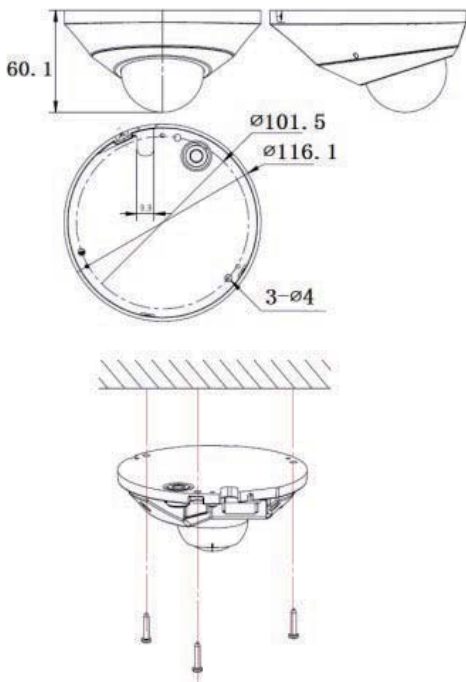

Camera	
Image Sensor	1/2.8" Sony Startvis CMOS
Core Processor	ARM9 Architecture
Operating System	Embedded Linux
Signal System	PAL/NTSC
Min. Illumination	Color: 0.002Lux(F1.2,AGC ON) B/W: 0.001Lux(F1.2,AGC ON); 0Lux with IR
Shutter Time	1s ~ 1/10000s
Lens	2.8mm/4mm, Angle of View: 113.5°/83.3°
Lens Mount	φ12
Auto Iris	N/A
Day& Night	Dual IR Cut Filter with Auto Switch
Wide Dynamic Range	100 dB
Digital Noise Reduction	3D DNR
Compression Standard	
Video Compression	H.265/H.264 HP/MP/BP/M-JPEG
Video Bit Rate	32Kbps~16Mbps
Audio Compression	G.711A/G.711U/ADPCM/AAC
Audio Bit Rate	G711 8KHz, 64kbps ADPCM 8KHz, 32kbps AAC 48KHz, 96-320kbps
Image	
Max. Image Resolution	1920x1080
Frame Rate	50Hz: 25fps (1920x1080), 25fps (1280 × 960), 50fps (1280 × 720) 60Hz: 30fps (1920x1080), 30fps (1280 × 960), 60fps (1280 × 720)
Triple Stream	Mainstream:1080P(1920x1080) Substream:D1(704x576) 3rd stream:720P(1280x720)
Image Settings	Brightness, Saturation, Contrast,Flip Mode Adjustable by Client Software or Web Browser
HLC	Y
Smart Defog	Y
Corridor	Y(Only for 1080P)
EIS	Y
ROI	4 Zones
Privacy Mask	4 Zones
Picture Overlay	200 × 200, BMP 24bit, Zone Configurable
OSD	16×16, 32×32, 24×24, 48×48, 64×64, 96×96 Size Letters Such as Week, Date, Time, Total 5 Regions
Network	
Browser	IE8,IE9,IE10IE,11,Chrome30,Firefox24
Network Storage	FTP
NTP	Y
Video Analytics	Tripwire/Perimeter/Crowd/Foreign Object/Missing Object/Fast Moving/Loitering/Parking/Scene Change/Blur Image/Abnormal Audio
Alarm Trigger	Motion Detection/IP Conflict/MAC Conflict/Port Alarm/Mask Alarm
Protocols	IPV4/IPV6/HTTP/802.1x/FTP/SNMP/UPnP/SNMP/DNS/DDNS/NTP/RTSP/TCP/UDP/DHCP/PPPoE
User Permission	4 Level/8 Users
Remote Connection	3 Users Access at the Same Time
System Compatibility	ONVIF (Profile S), SDK,CGI
Interface	
Audio Input	1-ch, Built-in Mic
Audio Output	1-ch
Communication Interface	1-ch RJ45 10M/100M Ethernet Interface Wifi (IEEE 802.11b/g/n)
Alarm Input	1-ch
Alarm Output	1-ch
Video Output	N/A
On-board Storage	MicroSD Card Slot, Up to 128GB
Reset Button	Y
Extension	N/A
General	
Language	English,Spanish,Korean,Italian,Turkish,Thai,Russian,Traditional Chinese
Operating Conditions	-30 °C ~60 °C (IR OFF) /-20 °C ~40 °C (IR ON), 0 ~95% RHG
Power Supply	DC12 V ± 10%, PoE (802.3af)
Power Consumption	Max. 5W (IR OFF) (ICR Instant Switch 10W) Max. 8W (IR ON)
Circuit Protection	TVS 6000V, Lightning/Surge Protection: (Power 2000V, RJ45 1000V)
Impact Protection	Only for Indoor Installation, IK10
IR Range	10m~15m
IR LEDs	10pcs φ3 IR LEDs
Dimensions	116mm×116mm×60mm
Weight	0.25KG (IP Camera Only); 0.4KG (with Packing Box)

*Specifications subject to change without notice